

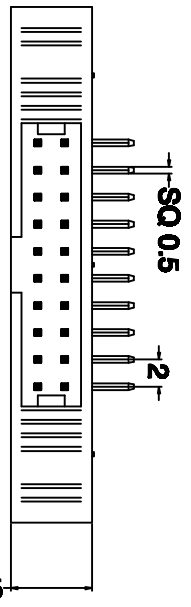



1 2 3 4 5 6 7 8 9

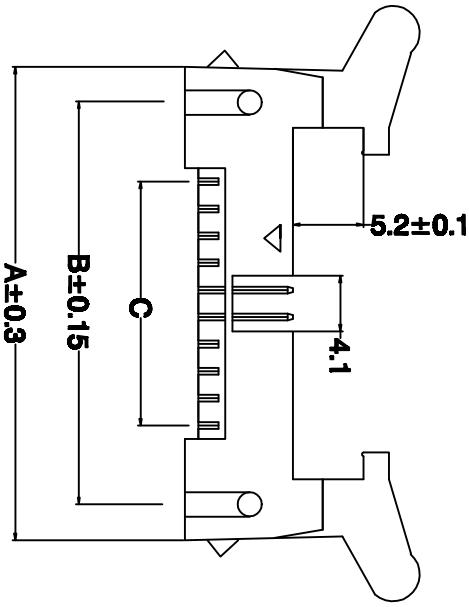

**SPECIFICATIONS**  
 Current Rating: 3Amps  
 Insulation Resistance: 1000MΩ min  
 Withstanding Voltage: 1000VAC  
 Contact Resistance: 20mΩ max  
 Operating Temperature: -40° C to +105° C  
 Standard: PBT  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Max. Processing Temp: 180° C for 30-60second  
 (200° C for 10second)

Code Description  
**CH-200-EBH-XY-R-XY-A**

- (1) Pin Spacing: 2.0±2.0mm
- (2) Product Name: EBH=Ejector Box Header
- (3) No. of Pins Per Row: 6-64
- (4) Contact Type: S=Straight; R=Right/ Angle; M=SMT
- (5) Contact Plating: SN=Tin; XY=12Y, 14Y, 18Y, 20Y, 25Y, 30Y, 35Y; SO=Gold Flash/Tin; AU09=Au0.8u''
- (6) Insulator Material Option:  
 A=BK-PBT; B=BK-PA6T; C=BK-PA46; D=BK-LCP; S=Special

# 慈溪慈惠电子元件厂

## Cixi Cihui Electronic Components Factory

UNLESS OTHERWISE SPECIFIED TOLERANCE

X	: ±0.3	X°	: ±5°
X.X	: ±0.2	X.X°	: ±1°
X.XX	: ±0.2	X.XX°	: ±0.5°

DRAWN NAME: CH-200-EBH-XY-R-XY-A

SIZE	A4	SCALE	N:1	PRODUCT	
REV	A	UNIT	mm	PROJECT	
				PAGE	1/1

CHECKED	LTD	DATE	05/28	CHECKED	DATE
---------	-----	------	-------	---------	------

No. of	DIN. A	DIN. B	DIN. C	No. of	DIN. A	DIN. B	DIN. C	No. of	DIN. A	DIN. B	DIN. C
6	22.40	15.70	4.00	16	31.40	25.70	14.00	40	51.20	47.70	38.00
8	24.20	17.70	6.00	20	35.00	29.70	18.00	50	69.20	57.70	48.00
10	26.00	19.70	8.00	26	38.60	33.70	24.00	60	87.20	67.70	58.00
12	27.80	21.70	10.00	30	42.20	37.70	28.00	64	90.80	71.70	62.00
14	29.60	23.70	12.00	34	45.80	41.70	32.00	68	94.40	75.70	68.00